











Tape Light Installation Instructions

(Part #'s TPL1232-500, TPL1280-500, TPL12RD-500 or TPL12BL-500)

PARTS INCLUDED:					
					
Tape Light	UL Recognized Power Supply - Hardwire	UL Recognized Power Supply – Plug-In	Clear Track (Optional)	Male/Male Connector (Plug-in Version Only)	12" Pigtail (Plug-in Version Only)
TOOLS NEEDED (Customer Provided):					
					
Electric Drill w/ Phillips Bit	Wire Nuts	Screws	Construction Adhesive (Optional)		

Tape Light Safety Instructions

IMPORTANT SAFETY INSTRUCTIONS. READ CAREFULLY FOR YOUR PROTECTION AND SAVE ALL INSTRUCTIONS.

- *Disconnect power before installing, adding or changing any component.
- *This power supply must be installed according to the National Electrical Code and local building codes
- *To avoid a hazard to children, account for all parts and destroy all packing materials.
- *Any installation, other than a "plug-in" configuration to a UL socket, should be completed by a qualified electrician.
- *CAUTION:** To reduce the risk of fire and electrical shock, use only with class 2 approved power supply designed for use with elio LED lights.
- *Please note that the Tape light can only be used with a 12V power supply. Anything larger will run the risk of burning out the light.
- *Do not install any luminaire assembly closer than 6" from any combustible material.

LOW VOLTAGE CAUTIONS

APPLICATIONS

Low voltage electronic power supplies should not be installed in areas with excessive heat around the power supply. Consult a qualified lighting designer if uncertain of the sustainability for a given application.

SERVICE

There are no user-serviceable parts inside. Opening unit will void warranty. Contact elio™ for service parts at 888-871-8860.

Tape Light Warranty Information

GENERAL PRODUCT LIMITED WARRANTY

ITC Incorporated under its corporate name or the elio trade name (collectively hereafter referred to as the "Company") warrants, to the original purchaser, that the product will be free of defects in materials and/or workmanship for the period of time set forth herein. This warranty period will begin from the original date of purchase of the product. Except as set forth below, this general product limited warranty will extend for three years. Power supplies also have a 3 year warranty.

MAXIMUM LIABILITY The Company's liability to repair or replace a damaged item shall be limited to the original purchaser of the item at the original invoice price of the damaged unit. Labor and freight will not be included

INSPECTION The Company reserves the right to review the damaged product and the site where the damage occurred. The Company may require the purchaser to ship the item to the Company for inspection. The damaged item must remain available for inspection until the claim is finalized. In the event the Company requests to inspect the product, it agrees to dispatch its findings pertaining to the alleged defective product within 45 days of receiving the product. Whenever claims are settled, the Company reserves the right to be subrogated under any existing insurance policies the purchaser may have.

EVENTS THAT VOID WARRANTY All above warranties are null and void if any one or more of the following events occurs: (a) the item is not provided to ITC for inspection upon the Company's request; (b) the Company determines that the item has been improperly installed, altered in any way or tampered with; (c) the Company determines that the item was not used under normal operating conditions or in accordance with labels or instructions for the item including, (d) the Company determines the product was not properly maintained, and/or; (e) the Company determines that an unauthorized repair, modification, disassembly, or other changes to the product created the alleged defect. In addition to the foregoing, this Warranty does not protect against damage to the product when the Company determines, in its sole discretion, that the damage resulted from acts of God such as lightning, flood, earthquake, war, vandalism, theft, normal-use wear and tear, terrorism, strikes, and labor stoppages. This warranty specifically excludes damage, deterioration or discoloration caused by sunlight or similar ultraviolet rays and/or wavelengths and/or dents, holes or scratches to the unit caused by stones, rocks and/or debris.

EXCLUSIVE REMEDY This Warranty contains the sole warranty of the Company with respect to the product and is given in lieu of all other warranties. There are no other warranties, express or implied, including implied warranties of merchantability or fitness for a particular purpose and any implied warranties that cannot be waived and/or excluded are hereby limited in duration to the terms of this Warranty.1

LIMITATION ON LIABILITY In no event shall the Company or any affiliate of the Company be liable for direct, indirect, special, incidental, consequential, or multiple damages arising out of the use of the item, regardless of the legal theory on which such claim is based, even if the Company has been advised of the possibility of such damage. Consequential damages shall include, but are not limited to loss of profits, loss of savings or revenue.


1 Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not be applicable.

Tape Light Installation Instructions

1. **Installing the track (Optional):**
Determine the installation location of your tape lighting. Once determined attach the clear plastic track using screws (customer supplied). **Note: The plastic track does not come with pre-drilled holes.** The track can also be glued in place using construction adhesive; however, the adhesive may damage the surface if the track is ever removed.



2. **OPTION 1: Wiring the light to a hardwire power supply:**
Using wire nuts connect the positive line on the tape light to the positive line on the 12V DC power supply. Connect the negative line to the ground lead on the 12V power supply (See Figure 1).



3. **OPTION 1: Wiring the power supply to the building's power:**

Using wire nuts connect the Line voltage on the power supply to the building's Live (Black) voltage. Next, connect the Neutral (White) line on the power supply to the building's neutral (White) line. Test Light to ensure connections are working (See Figure 1).



4. **OPTION 2: Wiring the pigtail to the light (Plug-in power supply):**
Using wire nuts attach the positive (red) line on the tape light to the positive (red) line on the pigtail. Make the same connections with the negative (black) line.



5. **OPTION 2: Attaching the connector & power supply:**
Plug the barrel connector on the light into the male/male connector. Next, plug the barrel connector on the power supply into the connector. Plug-in light and test connections.



6. **Installing the light:**
The light can either be installed in a track or taped in place. To install in a track, simply press light into the track you installed in step 1. To tape the light in place remove the paper from the back of the light and press light in place.

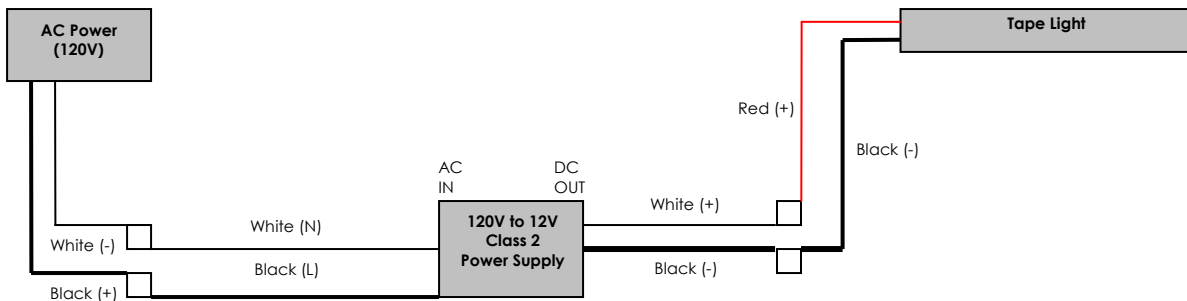


Figure 1 – Wiring Diagram