


30 Watt Wallwart Switching Adaptor

Part Number | 690010.004

Product Details

Housing	Plastic
Wattage	30W
AC Input	100-240V AC
DC Output	24V DC, 1.25 Amps
Frequency	50-60Hz
Power Factor	.90
Operating Temp	0°C - 40°C
Protection	Over-voltage, Over-current, Over-power & Short circuit protection

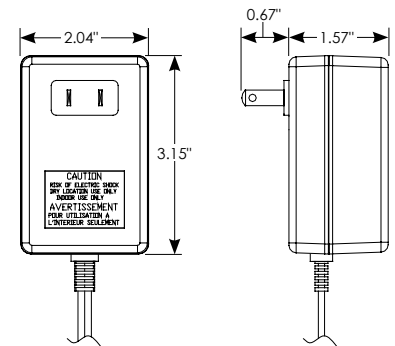

Features


- Direct plug-in electrical outlet.
- 5'-9" wire with barrel connector on DC side.
- Designed to work with LED products.
- Performs to ANSI/UL STD. 60950-1

40 Watt LED Driver

Part Number | 690010.007

Product Details

Housing	Plastic
Wattage	40W
AC Input	100-240V AC
DC Output	24V DC, 1.67 Amp
Frequency	50-60Hz
Input Current	0.5 Amps max @ 120V AC
Power Factor	.92
Operating Temp	0°C - 40°C
Protection	Over-voltage, Over-current & Short circuit protection, Auto-recovery.



Features


- UL1310 Class 2 recognized.
- Designed to work with LED products.
- Compact and lightweight.
- Active power factor to reduce power consumption.

75W Power Supply With Plug and Connector

Part Number | 690010.017

Product Details

Housing	Aluminum
Wattage	75W
AC Input	100-277V AC
DC Output	24V DC, 2.7Amps
Frequency	50-60Hz
Input Current	0.9Amps @ 120V AC
Power Factor	.94
Operating Temp	-40°C - 65°C
Protection	Over-voltage, Over-current & Short circuit protection, Auto-recovery.

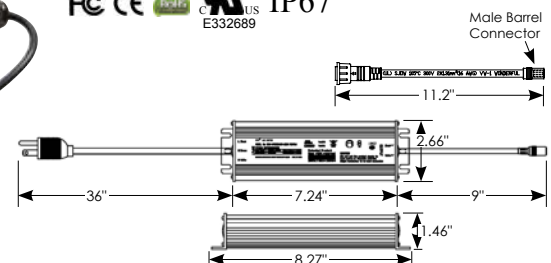

Features

- UL1310 Class 2 recognized.
- Designed to work with LED products.
- Compact and lightweight.
- Active power factor to reduce power consumption.
- Suitable for wet locations.
- FCC Compliant; IP67 Rated.