


MR16 Side Pin LED

Product Details:

| | |
|--------------------------------|----------------------------------|
| Housing - heatsink | Aluminum - chrome plated |
| Wattage | 3.8W |
| Voltage w/out LED Power Supply | 12-30V DC |
| Current | 0.28 Amp at 13.6V |
| LED Color Temperature | 3500K ±200K binning tolerance |
| CRI | >80 |
| Luminous Density | 250 Lumens |
| Base Type | 2 Pin GX5.3 |
| Beam Angle | Flood: 120° |
| Efficacy | 73.6 lm/w @ 12V DC |

Part Number:


MR16SPH35-4W30V : 3500K FLOOD

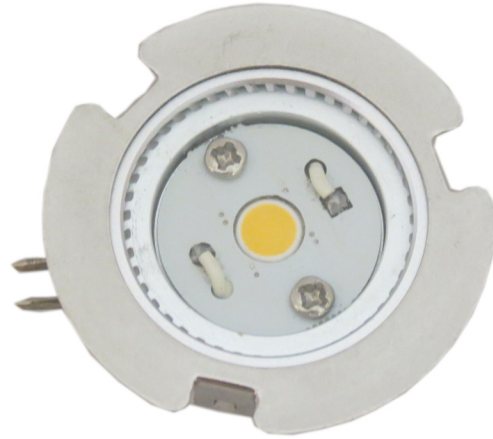

Product Dimensions:

Spectrophotometer Test Report

Test results for the MR16SPH35-4W30

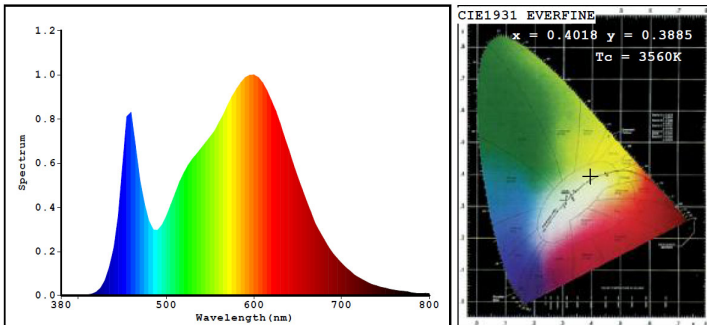

Color Parameters

Chromaticity Coordinate: $X=0.4018$ $Y=0.3885/u'=0.4018$
 $v'=0.3885$ $T_c=3560K$

Photo Parameters

Flux: 384.45 lm Efficacy: 71.17 lm/w

Electrical Parameters

Luminaire: $U=13.60V$ $I=0.3972A$ $P=5.402W$ $PF=1.000$

