



PARTS NEEDED:

	
Luna Diffused Flex Light	Flex Light Mounting Channel <small>*Track sold separately</small>

TOOLS NEEDED (Customer Provided):

	
Power Drill w/ Phillips Bit	#4 Wood Screws


Safety Instructions

- Disconnect power before installing, adding or changing any component.
- To avoid a hazard to children, account for all parts and destroy all packing materials.
- Do not install any luminaire assembly closer than 6" from any combustible materials.

1. Installing the Channel:

Install the appropriate length of channel for the size of the light being used. ITC recommends a #4 flat head screw for installation (every 12"). This allows the flex light to be mounted flush in the channel. Pre drill hole with 9/64" bit (It is easier to drill holes first with channel upside down prior to installation).

If using the 3M tape mounting simply peel paper backing off and install track in desired location. ITC recommends that 3M Prime 94 be used to prepare the surface before installing the track.

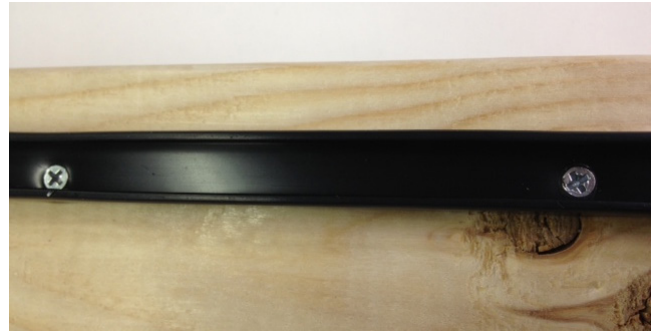

2. Installing the light:


Begin by un-rolling the entire length of RNLL, then, starting at the wire lead end and beginning of channel, work the light into the channel going 6" at a time. The light should go into the channel pretty easily by just thumbing it in. When pushing the light into the channel, make sure to push towards the wired end. The silicone on the light is flexible and pushing away from the wired end will leave a gap at the end of the run.

*Do not use any roller as that may cause damage to the LED circuit.




3. Wiring to the power supply (Power supply sold separately):

Caution: Do not bend lighting more than necessary. It should only bend to 1" radius. Bending to tight 90 degree angle could cause damage to circuit. Only bend the LED ribbon in the one natural direction (do not try to bend in unnatural direction such as twisting).

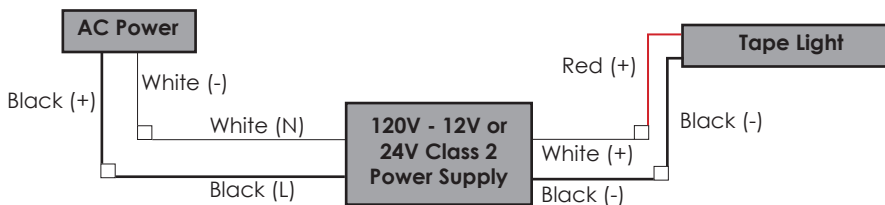

*Commercial/Residential Applications

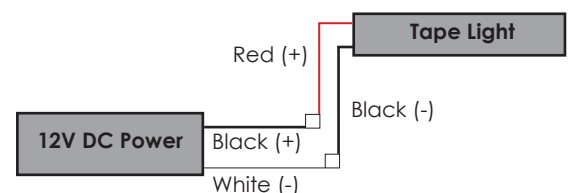

*RV/Marine Applications