

## Flex Connex™ Tape Light Installation Instructions (Patent Pending)

(Part #'s: The connector system can be used with any of the elio/ITC tape or flex light products)

**PARTS NEEDED:** (Parts needed will depend on your specific installation, below is an overview of all available parts)

Track (various options available)	3" Tape to Wire	12" Tape to Wire	3" Tape to Tape	6" Tape to Tape	90° Tape to Tape
2-Way Tape to Tape	3-Way Tape to Tape	Tape to Tape	TPB Tape Light Seal	Shrink Tube	Finished End Caps (RNLL, RBLL or RSL)

**TOOLS NEEDED (Customer Provided):**

Box Cutter/Razor Blade	Electric Drill w/ Phillips Bit	Screws	Construction Adhesive (Optional)	Heat Gun or Hair Dryer	Dow Corning 732 Glue (RNLL, RBLL & RSL)

## Flex Connex Tape Light Safety Instructions

**IMPORTANT SAFETY INSTRUCTIONS. READ CAREFULLY FOR YOUR PROTECTION AND SAVE ALL INSTRUCTIONS.**

\*Disconnect power before installing, adding or changing any component.

\*To avoid a hazard to children, account for all parts and destroy all packing materials.

\*Do not install any luminaire assembly closer than 6" from any combustible material.

## Flex Connex Tape Light Warranty Information

### GENERAL PRODUCT LIMITED WARRANTY

ITC Incorporated under its corporate name or the elio trade name (collectively hereafter referred to as the "Company") warrants, to the original purchaser, that the product will be free of defects in materials and/or workmanship for the period of time set forth herein. This warranty period will begin from the original date of purchase of the product. Except as set forth below, this general product limited warranty will extend for three years. Power supplies also have a 3 year warranty.

**MAXIMUM LIABILITY** The Company's liability to repair or replace a damaged item shall be limited to the original purchaser of the item at the original invoice price of the damaged unit. Labor and freight will not be included

**INSPECTION** The Company reserves the right to review the damaged product and the site where the damage occurred. The Company may require the purchaser to ship the item to the Company for inspection. The damaged item must remain available for inspection until the claim is finalized. In the event the Company requests to inspect the product, it agrees to dispatch its findings pertaining to the alleged defective product within 45 days of receiving the product. Whenever claims are settled, the Company reserves the right to be subrogated under any existing insurance policies the purchaser may have.

**EVENTS THAT VOID WARRANTY** All above warranties are null and void if any one or more of the following events occurs: (a) the item is not provided to ITC for inspection upon the Company's request; (b) the Company determines that the item has been improperly installed, altered in any way or tampered with; (c) the Company determines that the item was not used under normal operating conditions or in accordance with labels or instructions for the item including, (d) the Company determines the product was not properly maintained, and/or; (e) the Company determines that an unauthorized repair, modification, disassembly, or other changes to the product created the alleged defect. In addition to the foregoing, this Warranty does not protect against damage to the product when the Company determines, in its sole discretion, that the damage resulted from acts of God such as lightning, flood, earthquake, war, vandalism, theft, normal-use wear and tear, terrorism, strikes, and labor stoppages. This warranty specifically excludes


damage, deterioration or discoloration caused by sunlight or similar ultraviolet rays and/or wavelengths and/or dents, holes or scratches to the unit caused by stones, rocks and/or debris.

**EXCLUSIVE REMEDY** This Warranty contains the sole warranty of the Company with respect to the product and is given in lieu of all other warranties. There are no other warranties, express or implied, including implied warranties of merchantability or fitness for a particular purpose and any implied warranties that cannot be waived and/or excluded are hereby limited in duration to the terms of this Warranty.

**LIMITATION ON LIABILITY** In no event shall the Company or any affiliate of the Company be liable for direct, indirect, special, incidental, consequential, or multiple damages arising out of the use of the item, regardless of the legal theory on which such claim is based, even if the Company has been advised of the possibility of such damage. Consequential damages shall include, but are not limited to loss of profits, loss of savings or revenue. Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not be applicable.

## Flex Connex Tape Light Installation Instructions


1. Cut your tape light to the desired length, making sure to cut from the wired end. Each tape light will have a line indicating the cut lines. Failure to cut on the designated lines will damage the tape light and connector will not work.



**Note:** The various types & connector system have been designed to work as a system. It's very important that the + (red wire) & - (black wire) symbols on the tape light & Flex Connex align when the light is attached to the connector base. This process is simplified when the light is used from the start of the roll. If for some reason the location of the wires needs to be switched, the cover can be removed & the wire location can be changed.



2. Once the tape light is cut, select the connector needed for tape light type and place the cut end over the pins making sure to line up the positive and negative terminals. Please note, when making a connection on the RNLL flex light, you will first need to insert the clear spacer piece. If using TPB, make sure to install the TPB tape light seal on tape light before making connection.

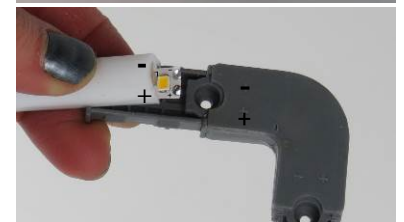

3. Press the clear cap over the tape until it snaps into place. If using the shrink tubing slide it down onto the connector piece, then use a hair dryer to seal the connection. When using RNLL diffused flex light heat shrink each connection before moving onto the next connection. To completely seal and finish the end on the RNLL, RBLL or RSLL version use Dow Corning 732 glue to attach the finished end cap.



4. Once all connections have made proceed with installing the light. The light can either be installed in a track or taped in place. To install in a track, simply screw or tape the track in place (**Note:** the track can be installed using construction adhesive as well). Once track is installed, press light into the track. To tape the light in place, remove the paper from the back of the light and press light in place. Wire the tape light to your power source and turn on. If the light does not come on, check to make sure the positive/negative terminals on the light are lined up correctly with the positive/negative on the connector.

