

# Luna™

## Diffused Flexible LED Light

### Features


- Neon lighting-like illumination
- Soft and appealing light output
- Great for applications where spot-free illumination is required. Example: Undercabinet applications to eliminate spots on the counter.
- Available in any length up to 196"
- Multiple color options available
- IP66 rated and UV stable for installation in damp, wet or exterior locations

### Product Details

Version	12V	24V
Dimensions	.43" H x .41" W x Various L	
Housing	Silicone	
Wattage	2.3 Watts/Ft	3.48 Watts/Ft
Voltage	10-14V DC	24V DC
Current	0.19 Amp/Ft	0.14 Amp/Ft
Lumens	161 Lm/Ft	259 Lm/Ft
Kelvin	3000K, *3500K, *4100K, 6300K, Blue, *Red & *Amber	3000K, 3500K, 4100K, 6300K, *Blue, *Red & *Amber
Cut Increment	1"	1.5"
LED Count	46 per foot	48 per foot
IP Rating	IP66 Sealed	
Operating Temp.	-20°F (-29°C) - 120°F (49°C)	

### Product Dimensions

#### Diffused Flex Light:

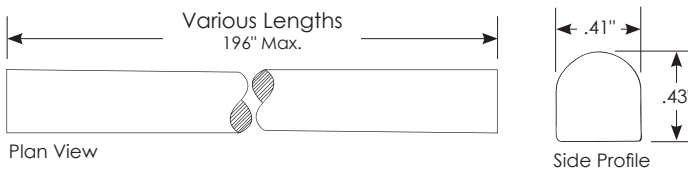

\* Available by special order

Patent Pending ULE339122

### Part Numbers

#### Diffused Flex Light:

**RNLL12KK-LLL | 12V**

**RNLL24KK-LLL | 24V**

KK=LED Color/Kelvin Color Temperature  
 [ 30=Warm White | 35=White | 41=Cool White  
 63=Daylight | BL=Blue | RD=Red | AM=Amber]

LLL=Length(in), 12V = 1" Increments  
 24V = 1.5" Increments

#### Mounting Channel:

- RBLL-1** Black Channel - With 3M Tape Backing
- RBLL-2** Black Channel - Without Tape Backing
- RBLL-4** White Channel - With 3M Tape Backing
- RBLL-5** White Channel - Without Tape Backing
- RNLL-1** Aluminum Channel - Without Tape Backing
- RNLL-1T** Aluminum Channel - With 3M Tape Backing
- RNLL-2** 45° Aluminum Channel - Without Tape Backing
- RNLL-2T** 45° Aluminum Channel - With 3M Tape Backing



Mounting Channels:



#### Mounting Channel:

