




Product Details


- Adjustable reflectors on the canopy style allow for more precise light direction
- Saw tooth LED positioning increases the light spread in all directions eliminating shadows between fixtures
- Flat silicone lens eliminates banding issues that are typically associated with curved lens
- Aluminum housing provides superior construction and a sleek modern profile

Product Dimensions

Double Canopy with Wings

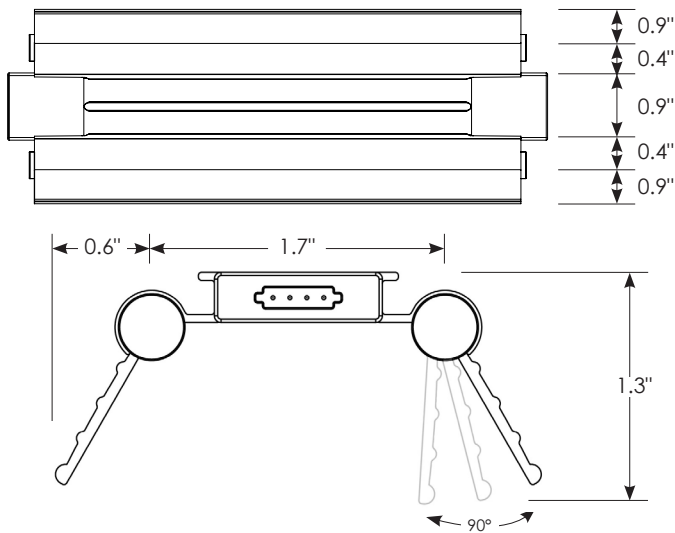


Shelf Light with Connector**

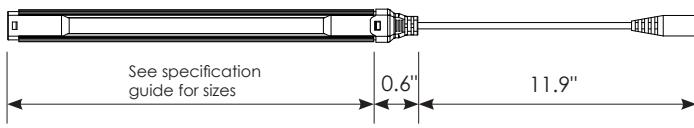

**Note: connector dimension is the same for both the Canopy & Shelf lights


Part Number

690UVW.XX.YY.ZZ
Please see specification guide for part configurations

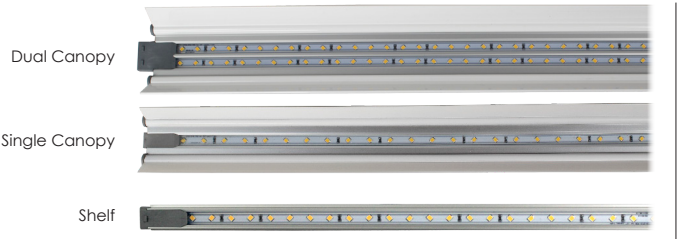


Product Dimensions

Single Canopy with Wings

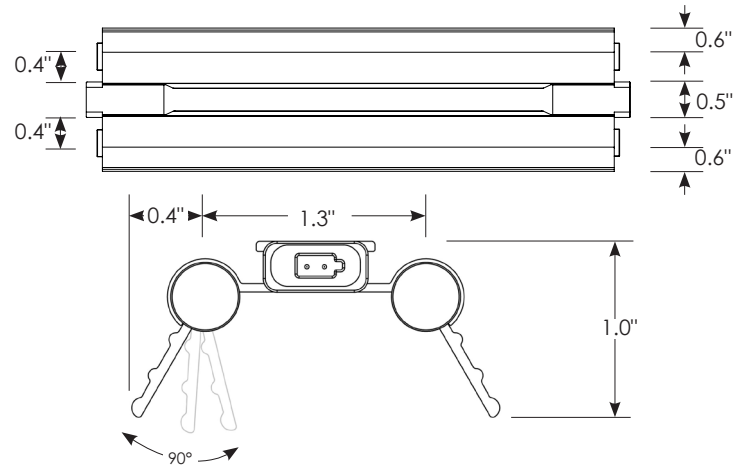

Shelf Light without Wings

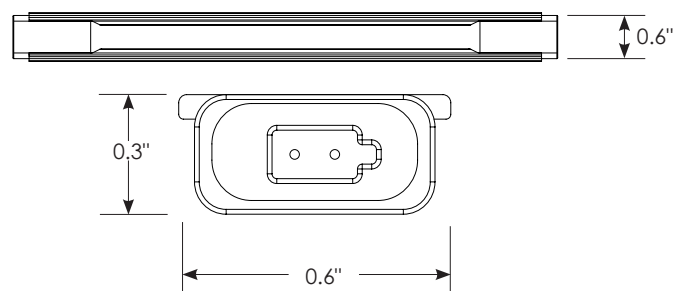

230 E. Lakewood Blvd. • P.O. Box 8338 • Holland • MI • 49422-8338
Phone: 616-396-1355 • Fax: 616-396-1152 • www.itc-us.com • sales@itc-us.com

Specification Guide: Horizontal

Sample Part #: 690671.36.30.24

Light Style(U)
Lumen Output(V)
of LED Strips (W)
Shelf Length (XX)
Color Temperature (YY)
Voltage (24)

Base Part #	Style	Light Output	# of LED Strips	Shelf Length	Color Temp.	Voltage	Light Length / Length with Connector
690	6 - Canopy 4 - Shelf	7 - Max Lumen 5 - Standard Lumen	1 - Single LED Strip 0 - Double LED Strip (Canopy only)	18	30 - 3000K 40 - 4000K	24 - 24V	15.3" / 16.3"
				24			21" / 22"
				36			33" / 34"
				48			46" / 47"
				60			57" / 58"
				72			69" / 70"

Accessory Specification

1 Determine the mounting bracket needed

Description	Part #
Straight Mount - Double Canopy	810-00008
Straight Mount - Single Canopy or Shelf	810-00009
30° Angle Mount* Shelf Light Only	810-00036



Double Canopy Straight Mount Clip



Single Canopy or Shelf Straight Mount Clip



30° Angle Mount Shelf Clip

2 Determine the connectors needed

Description	Part #
2" Add-On Double	690020.049
2" Add-On Single	690020.063
12" Jumper Cable Single	690020.050
12" Jumper Cable Double	690020.048



12" Jumper Cable (Single shown)



2" Add-On Single Canopy or Shelf



2" Add-On Double Canopy

3 Determine the power supply needed

Power Supply	Part #
60W	690010.035
100W	690010.031



*Note: The 60W or 100W power supplies shown above must be used in the installation in order to maintain the DLC listing.

Technical Specifications

Part Number	Description	Recommended Shelf Size	Wattage	Voltage	Current	Lumen Output	Beam Angle	CRI	Lamp Efficacy	
Max Lumen Style										
4000K	690471.18.40.24	15.3" Single shelf	18"	7.2 W	24 V	0.30 A	492 LM	120°	90+	68 LM/W
	690471.24.40.24	21" Single shelf	24"	10.8 W		0.45 A	737 LM			
	690471.36.40.24	33" Single shelf	36"	18 W		0.75 A	1229 LM			
	690471.48.40.24	46" Single shelf	48"	24.4 W		1.02 A	1651 LM			
	690471.60.40.24	57" Single shelf	60"	31.4 W		1.31 A	2123 LM			
	690471.72.40.24	69" Single shelf	72"	38.4 W		1.60 A	2595 LM			
3000K	690471.18.30.24	15.3" Single shelf	18"	7 W	24 V	0.29 A	444 LM	120°	90+	63 LM/W
	690471.24.30.24	21" Single shelf	24"	10.5 W		0.44 A	667 LM			
	690471.36.30.24	33" Single shelf	36"	17.5 W		0.73 A	1109 LM			
	690471.48.30.24	46" Single shelf	48"	23.5 W		0.98 A	1454 LM			62 LM/W
	690471.60.30.24	57" Single shelf	60"	30.2 W		1.26 A	1870 LM			
	690471.72.30.24	69" Single shelf	72"	37 W		1.54 A	2286 LM			

Part Number	Description	Recommended Shelf Size	Wattage	Voltage	Current	Lumen Output	Beam Angle	CRI	Lamp Efficacy	
Standard Lumen Style										
4000K	690451.18.40.24	15.3" Single shelf	18"	5.3 W	24 V	0.22 A	392 LM	120°	90+	73 LM/W
	690451.24.40.24	21" Single shelf	24"	7.1 W		0.30 A	523 LM			
	690451.36.40.24	33" Single shelf	36"	12.5 W		0.52 A	916 LM			
	690451.48.40.24	46" Single shelf	48"	17.6 W		0.73 A	1252 LM			71 LM/W
	690451.60.40.24	57" Single shelf	60"	21.2 W		0.88 A	1503 LM			
	690451.72.40.24	69" Single shelf	72"	26.5 W		1.10 A	1879 LM			
3000K	690451.18.30.24	15.3" Single shelf	18"	5.3 W	24 V	0.22 A	343 LM	120°	90+	64 LM/W
	690451.24.30.24	21" Single shelf	24"	7.1 W		0.30 A	458 LM			
	690451.36.30.24	33" Single shelf	36"	12.4 W		0.52 A	801 LM			
	690451.48.30.24	46" Single shelf	48"	17.1 W		0.71 A	1073 LM			63 LM/W
	690451.60.30.24	57" Single shelf	60"	20.6 W		0.86 A	1287 LM			
	690451.72.30.24	69" Single shelf	72"	25.7 W		1.07 A	1609 LM			

*Testing results shown are averages from the delivered fixture and include the lens

**Additional color temperatures available by special order

***Data shown is for a single LED strip